

## 3MHz 2A High $\eta$ Step-Down Converter in DFN2x2-8L Package

### DESCRIPTION

The ETA3410 is a high-efficiency, DC-to-DC step-down switching regulator, capable of delivering up to 2A of output current. The devices operate from an input voltage range of 2.6V to 5.5V and provide output voltages from 0.6V to  $V_{IN}$ , making the ETA3410 ideal for low voltage power conversions. Running at a fixed frequency of 3MHz allows the use of small inductance value and low DCR inductors, thereby achieving higher efficiencies. Other external components, such as ceramic input and output caps, can also be small due to higher switching frequency, while maintaining exceptional low noise output voltages. Built-in EMI reduction circuitry makes this converter ideal power supply for RF applications. Internal soft-start control circuitry reduces inrush current. Short-circuit and thermal-overload protection improves design reliability.

ETA3410 is housed in a tiny DFN2x2-8L package

### FEATURES

- ◆  $\eta$  up to 96%
- ◆ Up to 2A Max Output Current
- ◆ 3MHz Frequency
- ◆ Internal Compensation
- ◆ Clock Dithering
- ◆ Tiny DFN2x2-8L Package


### APPLICATIONS

- ◆ USB ports/Hubs
- ◆ Hot Swaps
- ◆ Cellphones
- ◆ Tablet PC
- ◆ Set Top Boxes

### ORDERING INFORMATION

| PART       | PACKAGE PIN | TOP MARK  |
|------------|-------------|---|
| ETA3410D21 | DFN2x2-8    | CEYW<br><div style="display: flex; align-items: center;"> <div style="border-left: 1px solid black; border-bottom: 1px solid black; width: 10px; height: 10px; margin-right: 5px;"></div> <span>Date Code</span> </div> <div style="display: flex; align-items: center; margin-top: 5px;"> <div style="border-left: 1px solid black; border-bottom: 1px solid black; width: 10px; height: 10px; margin-right: 5px;"></div> <span>Product Number</span> </div> |

### TYPICAL APPLICATION

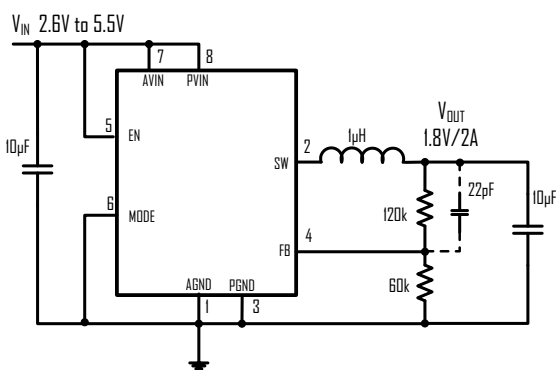

1.8V/2A 3MHz Step-Down Converter

