

## LOW DROPOUT LINEAR REGULATOR

## AZ1117C

## General Description

The AZ1117C is a low dropout three-terminal regulator.

The AZ1117C has been optimized for low voltage where transient response and minimum input voltage are critical. It provides current limit and thermal shutdown. Its circuit includes a trimmed bandgap reference to assure output voltage accuracy to be within  $\pm 1\%$ . On-chip thermal shutdown provides protection against a combination of high current and ambient temperature that would create excessive junction temperature.

The AZ1117C is available in 1.2V, 1.5V, 1.8V, 2.5V, 3.3V, 5.0V fixed output voltage versions and ADJ output voltage version. The fixed versions integrate the adjust resistors. It is also available in an adjustable version which can set the output voltage with two external resistors.

The AZ1117C is available in the industry-standard TO-252-2 (1), TO-252-2 (2), TO-252-2 (3), TO-252-2 (4), SOT-89 and SOT-223 power packages.

## Features

- Current Limit: 1.0A (Typ.)
- Output Noise from 10Hz to 10KHz: 0.003% of  $V_{OUT}$
- PSRR at  $I_{OUT}=300mA$  and  $f=120Hz$ : 70dB
- Output Voltage Accuracy:  $\pm 1\%$  (Except 1.2V version)
- On-chip Thermal Shutdown
- Maximum Quiescent Current:  $I_{QMAX}=6mA$
- Compatible with Low ESR Ceramic Capacitor
- Operation Junction Temperature: -20 to 125°C

## Applications

- USB Device
- Add-on Card
- DVD Player
- PC Motherboard

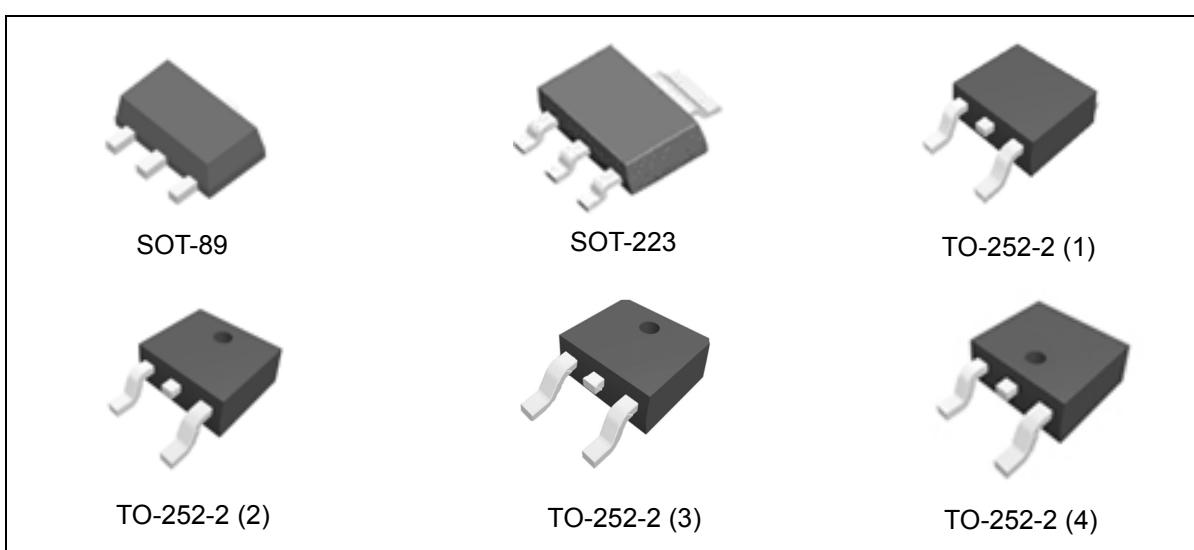


Figure 1. Package Types of AZ1117C


## LOW DROPOUT LINEAR REGULATOR

AZ1117C


## Pin Configuration

## D Package


(TO-252-2 (1))



(TO-252-2 (2))



(TO-252-2 (3))



(TO-252-2 (4))

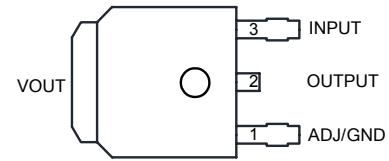


H Package  
(SOT-223)R Package  
(SOT-89)

Figure 2. Pin Configuration of AZ1117C (Top View)

## LOW DROPOUT LINEAR REGULATOR

AZ1117C

## Functional Block Diagram

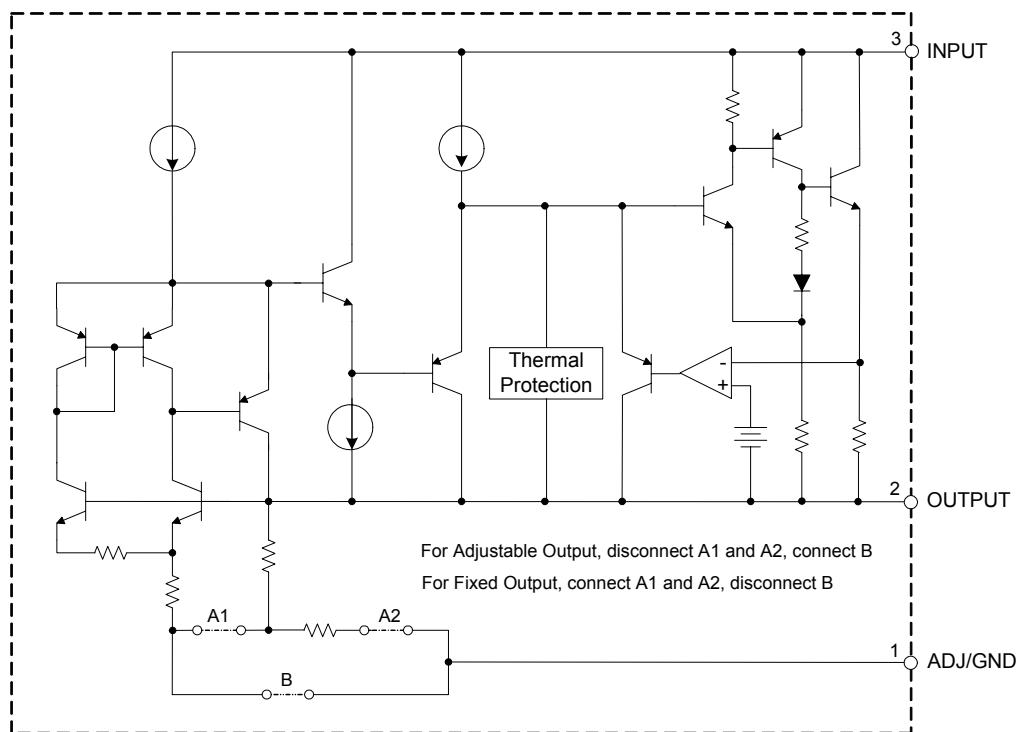



Figure 3. Functional Block Diagram of AZ1117C



## LOW DROPOUT LINEAR REGULATOR

AZ1117C
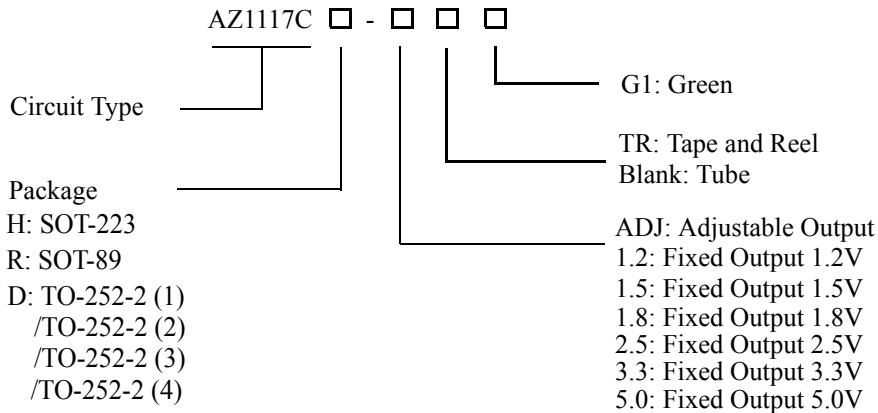
## Ordering Information



| Package   | Temperature Range | Part Number      | Marking ID     | Packing Type |
|---|-------------------|------------------|----------------|--------------|
| SOT-223   | -20 to 125°C      | AZ1117CH-ADJTRG1 | GH15B          | Tape & Reel  |
|   |                   | AZ1117CH-1.2TRG1 | GH16B          | Tape & Reel  |
|   |                   | AZ1117CH-1.5TRG1 | GH15C          | Tape & Reel  |
|   |                   | AZ1117CH-1.8TRG1 | GH16C          | Tape & Reel  |
|   |                   | AZ1117CH-2.5TRG1 | GH15D          | Tape & Reel  |
|   |                   | AZ1117CH-3.3TRG1 | GH16D          | Tape & Reel  |
|   |                   | AZ1117CH-5.0TRG1 | GH15E          | Tape & Reel  |
| TO-252-2 (1)<br>/TO-252-2 (2)<br>/TO-252-2 (3)<br>/TO-252-2 (4) | -20 to 125°C      | AZ1117CD-ADJG1   | AZ1117CD-ADJG1 | Tube         |
|   |                   | AZ1117CD-ADJTRG1 | AZ1117CD-ADJG1 | Tape & Reel  |
|   |                   | AZ1117CD-1.2G1   | AZ1117CD-1.2G1 | Tube         |
|   |                   | AZ1117CD-1.2TRG1 | AZ1117CD-1.2G1 | Tape & Reel  |
|   |                   | AZ1117CD-1.5G1   | AZ1117CD-1.5G1 | Tube         |
|   |                   | AZ1117CD-1.5TRG1 | AZ1117CD-1.5G1 | Tape & Reel  |
|   |                   | AZ1117CD-1.8G1   | AZ1117CD-1.8G1 | Tube         |
|   |                   | AZ1117CD-1.8TRG1 | AZ1117CD-1.8G1 | Tape & Reel  |
|   |                   | AZ1117CD-2.5G1   | AZ1117CD-2.5G1 | Tube         |
|   |                   | AZ1117CD-2.5TRG1 | AZ1117CD-2.5G1 | Tape & Reel  |
|   |                   | AZ1117CD-3.3G1   | AZ1117CD-3.3G1 | Tube         |
|   |                   | AZ1117CD-3.3TRG1 | AZ1117CD-3.3G1 | Tape & Reel  |
|   |                   | AZ1117CD-5.0G1   | AZ1117CD-5.0G1 | Tube         |
|   |                   | AZ1117CD-5.0TRG1 | AZ1117CD-5.0G1 | Tape & Reel  |



## LOW DROPOUT LINEAR REGULATOR

AZ1117C

## Ordering Information (Continued)

| Package | Temperature Range | Part Number      | Marking ID | Packing Type |
|---------|-------------------|------------------|------------|--------------|
| SOT-89  | -20 to 125°C      | AZ1117CR-ADJTRG1 | G27N       | Tape & Reel  |
|         |                   | AZ1117CR-1.2TRG1 | G28J       | Tape & Reel  |
|         |                   | AZ1117CR-1.5TRG1 | G28K       | Tape & Reel  |
|         |                   | AZ1117CR-1.8TRG1 | G28L       | Tape & Reel  |
|         |                   | AZ1117CR-2.5TRG1 | G28M       | Tape & Reel  |
|         |                   | AZ1117CR-3.3TRG1 | G28N       | Tape & Reel  |
|         |                   | AZ1117CR-5.0TRG1 | G27M       | Tape & Reel  |

BCD Semiconductor's products, as designated with "G1" suffix in the part number, are RoHS compliant and Green.



## LOW DROPOUT LINEAR REGULATOR

AZ1117C

## Absolute Maximum Ratings (Note 1)

| Parameter                            | Symbol            | Value   |     | Unit |
|--------------------------------------|-------------------|---|-----|------|
| Input Voltage                        | V <sub>IN</sub>   | 18  |     | V    |
| Operating Junction Temperature Range | T <sub>J</sub>    | 150   |     | °C   |
| Storage Temperature Range            | T <sub>STG</sub>  | -65 to 150  |     | °C   |
| Thermal Resistance (No Heatsink)     | θ <sub>JA</sub>   | SOT-89  | 210 | °C/W |
|                                      |                   | SOT-223   | 150 |      |
|                                      |                   | TO-252-2 (1)/TO-252-2 (2)/<br>TO-252-2 (3)/TO-252-2 (4) | 128 |      |
| Lead Temperature (Soldering, 10sec)  | T <sub>LEAD</sub> | 260   |     | °C   |

Note 1: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.

## Recommended Operating Conditions

| Parameter                            | Symbol          | Min | Max | Unit |
|--------------------------------------|-----------------|-----|-----|------|
| Input Voltage                        | V <sub>IN</sub> |     | 15  | V    |
| Operating Junction Temperature Range | T <sub>J</sub>  | -20 | 125 | °C   |



## LOW DROPOUT LINEAR REGULATOR

AZ1117C

## Electrical Characteristics

## AZ1117C-ADJ Electrical Characteristics

Operating Conditions:  $V_{IN}=V_{OUT}+2V$ ,  $I_{OUT}=10mA$ ,  $T_J=25^{\circ}C$ , unless otherwise specified. ( $P \leq$ maximum power dissipation). Limits appearing in **Boldface** type apply over the entire junction temperature range for operation,  $-20^{\circ}C$  to  $125^{\circ}C$ .

| Parameter                             | Symbol        | Conditions   |         | Min          | Typ   | Max          | Unit          |
|---------------------------------------|---------------|--|---------|--------------|-------|--------------|---------------|
| Reference Voltage                     | $V_{REF}$     |  |         | 1.238        | 1.250 | 1.262        | V             |
|                                       |               | $1.5V \leq V_{IN}-V_{OUT} \leq 10V$                                      |         | <b>1.225</b> | 1.250 | <b>1.270</b> |               |
| Line Regulation                       | $V_{RLINE}$   | $1.5V \leq V_{IN}-V_{OUT} \leq 10V$                                      |         | 0.001        | 0.1   | <b>0.2</b>   | %             |
|                                       |               |  |         |              |       |              |               |
| Load Regulation                       | $V_{LOAD}$    |  |         |              | 0.4   | 1.0          | %             |
| Dropout Voltage                       | $V_{DROP}$    | $\Delta V_{REF}=1\%$ , $I_{OUT}=0.8A$                                    | SOT-223 |              | 1.2   | <b>1.3</b>   | V             |
| Current Limit                         | $I_{LIMIT}$   |  |         | 0.85         | 1     |              | A             |
| Adjust Pin Current                    |               |  |         |              | 60    | <b>120</b>   | $\mu A$       |
| Adjust Pin Current Change             |               | $1.5V \leq (V_{IN}-V_{OUT}) \leq 10V$                                    |         |              | 0.2   | <b>5</b>     | $\mu A$       |
| Minimum Load Current                  |               | $1.5V \leq (V_{IN}-V_{OUT}) \leq 10V$                                    |         |              | 1.7   | <b>5</b>     | mA            |
| Ripple Rejection                      | PSRR          | $f=120Hz$ , $C_{OUT}=22\mu F$<br>$(V_{IN}-V_{OUT})=3V$ , $I_{OUT}=300mA$ |         |              | 70    |              | dB            |
| Temperature Stability                 |               |  |         |              | 0.5   |              | %             |
| RMS Output Noise (% of $V_{OUT}$ )    |               | $T_A=25^{\circ}C$ , $10Hz \leq f \leq 10KHz$                             |         |              | 0.003 |              | %             |
| Thermal Shutdown                      |               | Junction Temperature   |         |              | 160   |              | $^{\circ}C$   |
| Thermal Shutdown Hysteresis           |               |  |         |              | 16    |              | $^{\circ}C$   |
| Thermal Resistance (Junction to Case) | $\theta_{JC}$ | SOT-89   |         |              | 39    |              | $^{\circ}C/W$ |
|                                       |               | SOT-223  |         |              | 33    |              |               |
|                                       |               | TO-252-2 (1)/TO-252-2 (2)<br>/TO-252-2 (3)/TO-252-2 (4)                  |         |              | 22    |              |               |



## LOW DROPOUT LINEAR REGULATOR

AZ1117C

## Electrical Characteristics (Continued)

## AZ1117C-1.2 Electrical Characteristics

Operating Conditions:  $V_{IN} \leq 10V$ ,  $I_{OUT} = 10mA$ ,  $T_J = 25^\circ C$ , unless otherwise specified. ( $P \leq$  maximum power dissipation). Limits appearing in **Boldface** type apply over the entire junction temperature range for operation,  $-20^\circ C$  to  $125^\circ C$ .

| Parameter                                | Symbol        | Conditions   | Min          | Typ   | Max          | Unit         |   |
|--|---------------|--|--------------|-------|--------------|--------------|---|
| Output Voltage                           | $V_{OUT}$     |  | 1.176        | 1.2   | 1.224        | V            |   |
|  |               | $3.2V \leq V_{IN} \leq 10V$  | <b>1.152</b> | 1.2   | <b>1.228</b> |              |   |
| Line Regulation                          | $V_{RLINE}$   | $1.5V \leq V_{IN} - V_{OUT} \leq 10V$  | 0.5          | 6     | mV           |              |   |
|  |               |  |              |       | <b>10</b>    |              |   |
| Load Regulation                          | $V_{RLOAD}$   |  |              | 2     | 15           | mV           |   |
| Dropout Voltage                          | $V_{DROP}$    | $\Delta V_{OUT} = 1\%$ , $I_{OUT} = 0.8A$  | SOT-223      |       | 1.2          | <b>1.3</b>   | V |
| Current Limit                            | $I_{LIMIT}$   |  | 0.85         | 1     |              | A            |   |
| Quiescent Current                        | $I_Q$         | $I_{OUT} = 0$  |              | 4     | <b>6</b>     | mA           |   |
| Ripple Rejection                         | PSRR          | $f = 120Hz$ , $C_{OUT} = 22\mu F$<br>$(V_{IN} - V_{OUT}) = 3V$ , $I_{OUT} = 300mA$ |              | 70    |              | dB           |   |
| Temperature Stability                    |               |  |              | 0.5   |              | %            |   |
| RMS Output Noise<br>(% of $V_{OUT}$ )    |               | $T_A = 25^\circ C$ , $10Hz \leq f \leq 10KHz$                                      |              | 0.003 |              | %            |   |
| Thermal Shutdown                         |               | Junction Temperature   |              | 160   |              | $^\circ C$   |   |
| Thermal Shutdown Hysteresis              |               |  |              | 16    |              | $^\circ C$   |   |
| Thermal Resistance<br>(Junction to Case) | $\theta_{JC}$ | SOT-89   |              | 39    |              | $^\circ C/W$ |   |
|  |               | SOT-223  |              | 33    |              |              |   |
|  |               | TO-252-2 (1)/TO-252-2 (2)<br>/TO-252-2 (3)/TO-252-2 (4)                            |              | 22    |              |              |   |



## LOW DROPOUT LINEAR REGULATOR

AZ1117C

## Electrical Characteristics (Continued)

## AZ1117C-1.5 Electrical Characteristics

Operating Conditions:  $V_{IN} \leq 10V$ ,  $I_{OUT} = 10mA$ ,  $T_J = 25^\circ C$ , unless otherwise specified. ( $P \leq$  maximum power dissipation). Limits appearing in **Boldface** type apply over the entire junction temperature range for operation,  $-20^\circ C$  to  $125^\circ C$ .

| Parameter                                | Symbol        | Conditions   |         | Min          | Typ   | Max          | Unit         |
|--|---------------|--|---------|--------------|-------|--------------|--------------|
| Output Voltage                           | $V_{OUT}$     |  |         | 1.485        | 1.5   | 1.515        | V            |
|  |               | $3.5V \leq V_{IN} \leq 10V$  |         | <b>1.470</b> | 1.5   | <b>1.530</b> |              |
| Line Regulation                          | $V_{RLINE}$   | $1.5V \leq V_{IN} - V_{OUT} \leq 10V$  |         | 0.5          | 6     | mV           |              |
|  |               |  |         |              |       | <b>10</b>    |              |
| Load Regulation                          | $V_{RLOAD}$   |  |         |              | 2     | 15           | mV           |
| Dropout Voltage                          | $V_{DROP}$    | $\Delta V_{OUT} = 1\%$ , $I_{OUT} = 0.8A$  | SOT-223 |              | 1.2   | <b>1.3</b>   | V            |
| Current Limit                            | $I_{LIMIT}$   |  |         | 0.85         | 1     |              | A            |
| Quiescent Current                        | $I_Q$         | $I_{OUT} = 0$  |         |              | 4     | <b>6</b>     | mA           |
| Ripple Rejection                         | PSRR          | $f = 120Hz$ , $C_{OUT} = 22\mu F$<br>$(V_{IN} - V_{OUT}) = 3V$ , $I_{OUT} = 300mA$ |         |              | 70    |              | dB           |
| Temperature Stability                    |               |  |         |              | 0.5   |              | %            |
| RMS Output Noise<br>(% of $V_{OUT}$ )    |               | $T_A = 25^\circ C$ , $10Hz \leq f \leq 10KHz$                                      |         |              | 0.003 |              | %            |
| Thermal Shutdown                         |               | Junction Temperature   |         |              | 160   |              | $^\circ C$   |
| Thermal Shutdown Hysteresis              |               |  |         |              | 16    |              | $^\circ C$   |
| Thermal Resistance<br>(Junction to Case) | $\theta_{JC}$ | SOT-89   |         |              | 39    |              | $^\circ C/W$ |
|  |               | SOT-223  |         |              | 33    |              |              |
|  |               | TO-252-2 (1)/TO-252-2 (2)<br>/TO-252-2 (3)/TO-252-2 (4)                            |         |              | 22    |              |              |



## LOW DROPOUT LINEAR REGULATOR

AZ1117C

## Electrical Characteristics (Continued)

## AZ1117C-1.8 Electrical Characteristics

Operating Conditions:  $V_{IN} \leq 10V$ ,  $I_{OUT} = 10mA$ ,  $T_J = 25^\circ C$ , unless otherwise specified. ( $P \leq$  maximum power dissipation). Limits appearing in **Boldface** type apply over the entire junction temperature range for operation,  $-20^\circ C$  to  $125^\circ C$ .

| Parameter                                | Symbol        | Conditions   |         | Min          | Typ   | Max          | Unit         |
|--|---------------|--|---------|--------------|-------|--------------|--------------|
| Output Voltage                           | $V_{OUT}$     |  |         | 1.782        | 1.8   | 1.818        | V            |
|  |               | $3.8V \leq V_{IN} \leq 10V$  |         | <b>1.764</b> | 1.8   | <b>1.836</b> |              |
| Line Regulation                          | $V_{RLINE}$   | $1.5V \leq V_{IN} - V_{OUT} \leq 10V$  |         | 0.5          | 6     | mV           |              |
|  |               |  |         |              |       | <b>10</b>    |              |
| Load Regulation                          | $V_{RLOAD}$   |  |         |              | 2     | 15           | mV           |
| Dropout Voltage                          | $V_{DROP}$    | $\Delta V_{OUT} = 1\%$ , $I_{OUT} = 0.8A$  | SOT-223 |              | 1.2   | <b>1.3</b>   | V            |
| Current Limit                            | $I_{LIMIT}$   |  |         | 0.85         | 1     |              | A            |
| Quiescent Current                        | $I_Q$         | $I_{OUT} = 0$  |         |              | 4     | <b>6</b>     | mA           |
| Ripple Rejection                         | PSRR          | $f = 120Hz$ , $C_{OUT} = 22\mu F$<br>$(V_{IN} - V_{OUT}) = 3V$ , $I_{OUT} = 300mA$ |         |              | 70    |              | dB           |
| Temperature Stability                    |               |  |         |              | 0.5   |              | %            |
| RMS Output Noise<br>(% of $V_{OUT}$ )    |               | $T_A = 25^\circ C$ , $10Hz \leq f \leq 10KHz$                                      |         |              | 0.003 |              | %            |
| Thermal Shutdown                         |               | Junction Temperature   |         |              | 160   |              | $^\circ C$   |
| Thermal Shutdown Hysteresis              |               |  |         |              | 16    |              | $^\circ C$   |
| Thermal Resistance<br>(Junction to Case) | $\theta_{JC}$ | SOT-89   |         |              | 39    |              | $^\circ C/W$ |
|  |               | SOT-223  |         |              | 33    |              |              |
|  |               | TO-252-2 (1)/TO-252-2 (2)<br>/TO-252-2 (3)/TO-252-2 (4)                            |         |              | 22    |              |              |



## LOW DROPOUT LINEAR REGULATOR

AZ1117C

## Electrical Characteristics (Continued)

## AZ1117C-2.5 Electrical Characteristics

Operating Conditions:  $V_{IN} \leq 10V$ ,  $I_{OUT} = 10mA$ ,  $T_J = 25^\circ C$ , unless otherwise specified. ( $P \leq$  maximum power dissipation). Limits appearing in **Boldface** type apply over the entire junction temperature range for operation,  $-20^\circ C$  to  $125^\circ C$ .

| Parameter                                | Symbol        | Conditions   |         | Min          | Typ        | Max          | Unit         |
|--|---------------|--|---------|--------------|------------|--------------|--------------|
| Output Voltage                           | $V_{OUT}$     |  |         | 2.475        | 2.5        | 2.525        | V            |
|  |               | $4.5V \leq V_{IN} \leq 10V$  |         | <b>2.455</b> | <b>2.5</b> | <b>2.545</b> |              |
| Line Regulation                          | $V_{RLINE}$   | $1.5V \leq V_{IN} - V_{OUT} \leq 10V$  |         | 0.5          | 6          | mV           |              |
|  |               |  |         |              |            | <b>10</b>    |              |
| Load Regulation                          | $V_{RLOAD}$   |  |         |              | 2          | 15           | mV           |
| Dropout Voltage                          | $V_{DROP}$    | $\Delta V_{OUT} = 1\%$ , $I_{OUT} = 0.8A$  | SOT-223 |              | 1.2        | <b>1.3</b>   | V            |
| Current Limit                            | $I_{LIMIT}$   |  |         | 0.85         | 1          |              | A            |
| Quiescent Current                        | $I_Q$         | $I_{OUT} = 0$  |         |              | 4          | <b>6</b>     | mA           |
| Ripple Rejection                         | PSRR          | $f = 120Hz$ , $C_{OUT} = 22\mu F$<br>$(V_{IN} - V_{OUT}) = 3V$ , $I_{OUT} = 300mA$ |         |              | 70         |              | dB           |
| Temperature Stability                    |               |  |         |              | 0.5        |              | %            |
| RMS Output Noise<br>(% of $V_{OUT}$ )    |               | $T_A = 25^\circ C$ , $10Hz \leq f \leq 10KHz$                                      |         |              | 0.003      |              | %            |
| Thermal Shutdown                         |               | Junction Temperature   |         |              | 160        |              | $^\circ C$   |
| Thermal Shutdown Hysteresis              |               |  |         |              | 16         |              | $^\circ C$   |
| Thermal Resistance<br>(Junction to Case) | $\theta_{JC}$ | SOT-89   |         |              | 39         |              | $^\circ C/W$ |
|  |               | SOT-223  |         |              | 33         |              |              |
|  |               | TO-252-2 (1)/TO-252-2 (2)<br>/TO-252-2 (3)/TO-252-2 (4)                            |         |              | 22         |              |              |



## LOW DROPOUT LINEAR REGULATOR

AZ1117C

## Electrical Characteristics (Continued)

## AZ1117C-3.3 Electrical Characteristics

Operating Conditions:  $V_{IN} \leq 10V$ ,  $I_{OUT} = 10mA$ ,  $T_J = 25^\circ C$ , unless otherwise specified. ( $P \leq$  maximum power dissipation). Limits appearing in **Boldface** type apply over the entire junction temperature range for operation,  $-20^\circ C$  to  $125^\circ C$ .

| Parameter                                | Symbol        | Conditions   |         | Min          | Typ   | Max          | Unit         |
|--|---------------|--|---------|--------------|-------|--------------|--------------|
| Output Voltage                           | $V_{OUT}$     |  |         | 3.267        | 3.3   | 3.333        | V            |
|  |               | $5.3V \leq V_{IN} \leq 10V$  |         | <b>3.235</b> | 3.3   | <b>3.365</b> |              |
| Line Regulation                          | $V_{RLINE}$   | $1.5V \leq V_{IN} - V_{OUT} \leq 10V$  |         | 0.5          | 6     | <b>10</b>    | mV           |
|  |               |  |         |              |       |              |              |
| Load Regulation                          | $V_{RLOAD}$   |  |         |              | 2     | 15           | mV           |
| Dropout Voltage                          | $V_{DROP}$    | $\Delta V_{OUT} = 1\%$ , $I_{OUT} = 0.8A$  | SOT-223 |              | 1.2   | <b>1.3</b>   | V            |
| Current Limit                            | $I_{LIMIT}$   |  |         | 0.85         | 1     |              | A            |
| Quiescent Current                        | $I_Q$         | $I_{OUT} = 0$  |         |              | 4     | <b>6</b>     | mA           |
| Ripple Rejection                         | PSRR          | $f = 120Hz$ , $C_{OUT} = 22\mu F$<br>$(V_{IN} - V_{OUT}) = 3V$ , $I_{OUT} = 300mA$ |         |              | 70    |              | dB           |
| Temperature Stability                    |               |  |         |              | 0.5   |              | %            |
| RMS Output Noise<br>(% of $V_{OUT}$ )    |               | $T_A = 25^\circ C$ , $10Hz \leq f \leq 10KHz$                                      |         |              | 0.003 |              | %            |
| Thermal Shutdown                         |               | Junction Temperature   |         |              | 160   |              | $^\circ C$   |
| Thermal Shutdown Hysteresis              |               |  |         |              | 16    |              | $^\circ C$   |
| Thermal Resistance<br>(Junction to Case) | $\theta_{JC}$ | SOT-89   |         | 39           |       |              | $^\circ C/W$ |
|  |               | SOT-223  |         | 33           |       |              |              |
|  |               | TO-252-2 (1)/TO-252-2 (2)<br>/TO-252-2 (3)/TO-252-2 (4)                            |         | 22           |       |              |              |



## LOW DROPOUT LINEAR REGULATOR

AZ1117C

## Electrical Characteristics (Continued)

## AZ1117C-5.0 Electrical Characteristics

Operating Conditions:  $V_{IN} \leq 10V$ ,  $I_{OUT} = 10mA$ ,  $T_J = 25^\circ C$ , unless otherwise specified. ( $P \leq$  maximum power dissipation). Limits appearing in **Boldface** type apply over the entire junction temperature range for operation,  $-20^\circ C$  to  $125^\circ C$ .

| Parameter                                | Symbol        | Conditions   |         | Min          | Typ   | Max          | Unit         |
|--|---------------|--|---------|--------------|-------|--------------|--------------|
| Output Voltage                           | $V_{OUT}$     |  |         | 4.950        | 5.0   | 5.050        | V            |
|  |               | $6.5V \leq V_{IN} \leq 10V$  |         | <b>4.900</b> | 5.0   | <b>5.100</b> |              |
| Line Regulation                          | $V_{RLINE}$   | $1.5V \leq V_{IN} - V_{OUT} \leq 10V$  |         | 0.5          | 6     | mV           |              |
|  |               |  |         |              |       | <b>10</b>    |              |
| Load Regulation                          | $V_{RLOAD}$   |  |         |              | 2     | 15           | mV           |
| Dropout Voltage                          | $V_{DROP}$    | $\Delta V_{OUT} = 1\%$ , $I_{OUT} = 0.8A$  | SOT-223 |              | 1.2   | <b>1.3</b>   | V            |
| Current Limit                            | $I_{LIMIT}$   |  |         | 0.85         | 1     |              | A            |
| Quiescent Current                        | $I_Q$         | $I_{OUT} = 0$  |         |              | 4     | <b>6</b>     | mA           |
| Ripple Rejection                         | PSRR          | $f = 120Hz$ , $C_{OUT} = 22\mu F$<br>$(V_{IN} - V_{OUT}) = 3V$ , $I_{OUT} = 300mA$ |         |              | 70    |              | dB           |
| Temperature Stability                    |               |  |         |              | 0.5   |              | %            |
| RMS Output Noise<br>(% of $V_{OUT}$ )    |               | $T_A = 25^\circ C$ , $10Hz \leq f \leq 10KHz$                                      |         |              | 0.003 |              | %            |
| Thermal Shutdown                         |               | Junction Temperature   |         |              | 160   |              | $^\circ C$   |
| Thermal Shutdown Hysteresis              |               |  |         |              | 16    |              | $^\circ C$   |
| Thermal Resistance<br>(Junction to Case) | $\theta_{JC}$ | SOT-89   |         |              | 39    |              | $^\circ C/W$ |
|  |               | SOT-223  |         |              | 33    |              |              |
|  |               | TO-252-2 (1)/TO-252-2 (2)<br>/TO-252-2 (3)/TO-252-2 (4)                            |         |              | 22    |              |              |

## LOW DROPOUT LINEAR REGULATOR

AZ1117C

## Typical Performance Characteristics

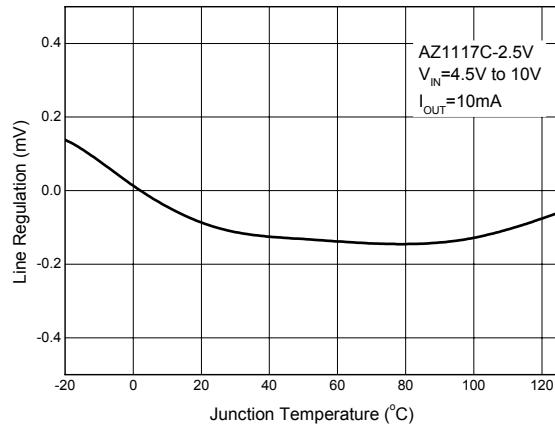


Figure 4. Line Regulation vs. Junction Temperature

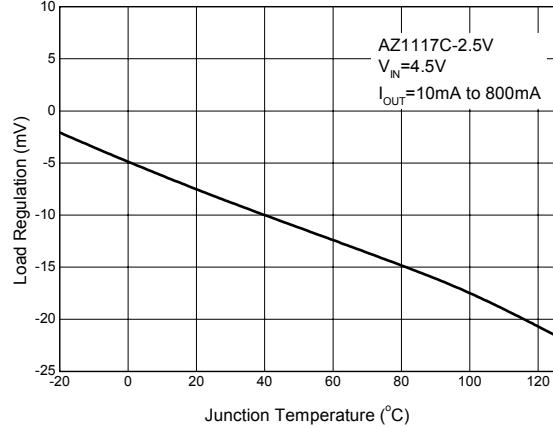


Figure 5. Load Regulation vs. JunctionTemperature

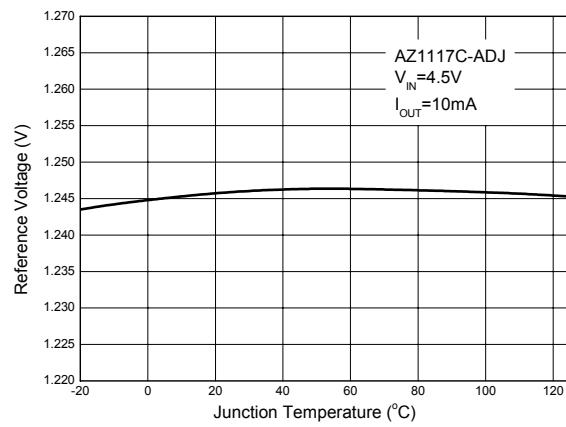


Figure 6. Reference Voltage vs. Junction Temperature

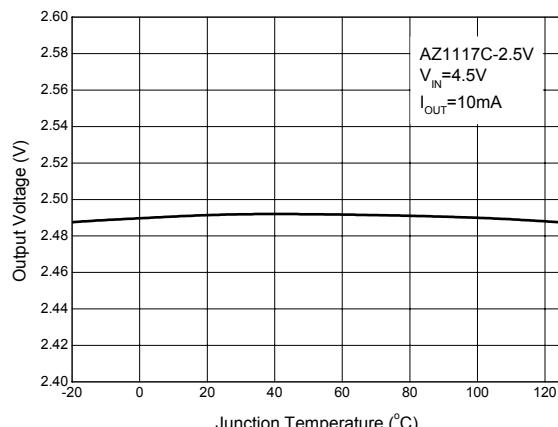


Figure 7. Output Voltage vs. Junction Temperature

## LOW DROPOUT LINEAR REGULATOR

AZ1117C

## Typical Performance Characteristics (Continued)

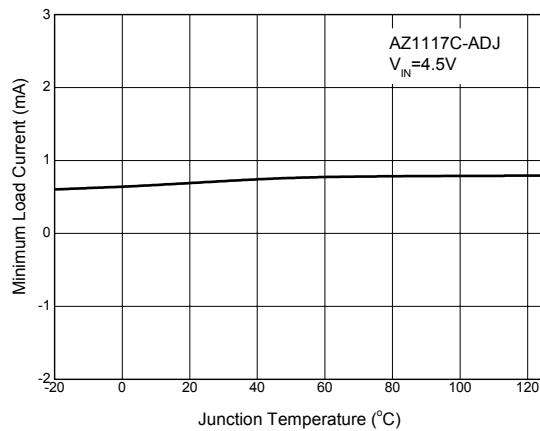


Figure 8. Minimum Load Current vs. Junction Temperature

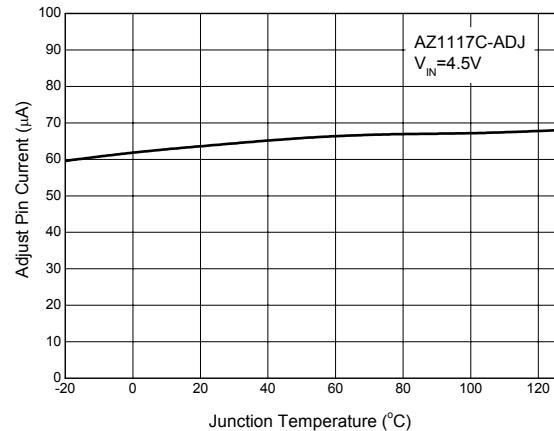


Figure 9. Adjust Pin Current vs. Junction Temperature

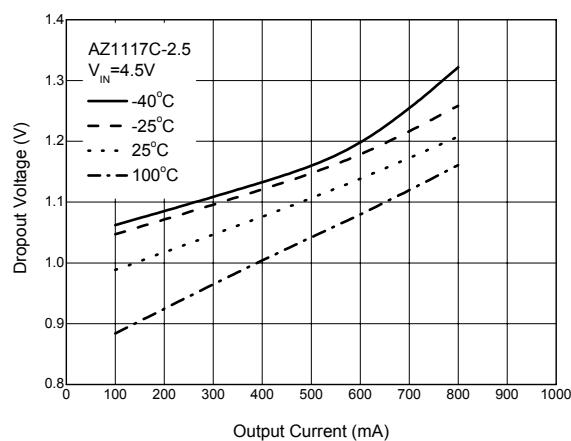


Figure 10. Dropout Voltage vs. Output Current

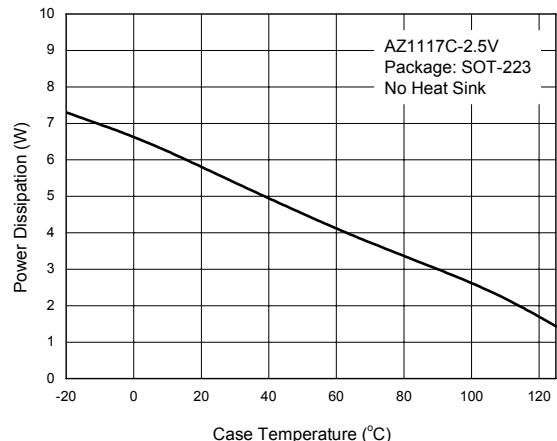


Figure 11. Power Dissipation vs. Case Temperature

## LOW DROPOUT LINEAR REGULATOR

AZ1117C

## Typical Performance Characteristics (Continued)

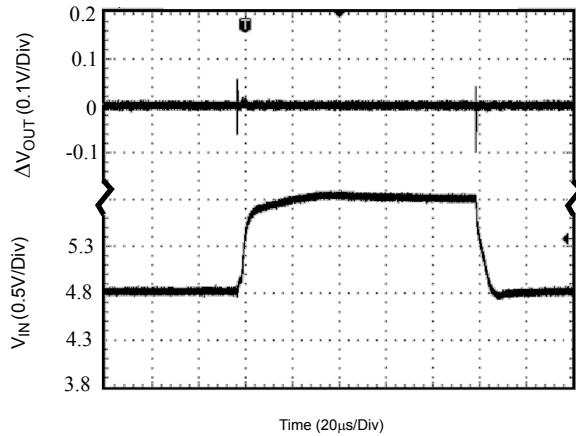


Figure 12. Line Transient Response

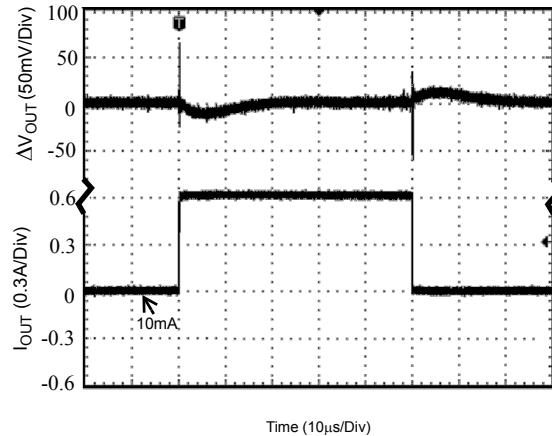


Figure 13. Load Transient Response

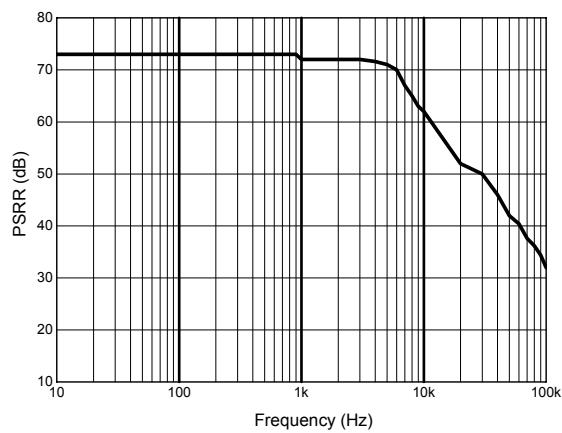


Figure 14. PSRR vs. Frequency

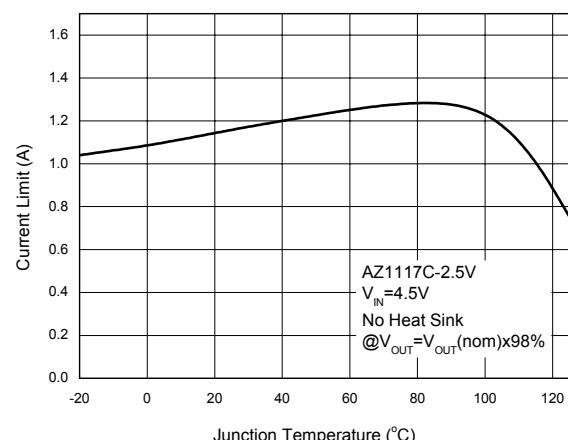


Figure 15. Current Limit vs. Junction Temperature

## LOW DROPOUT LINEAR REGULATOR

AZ1117C

## Typical Performance Characteristics (Continued)

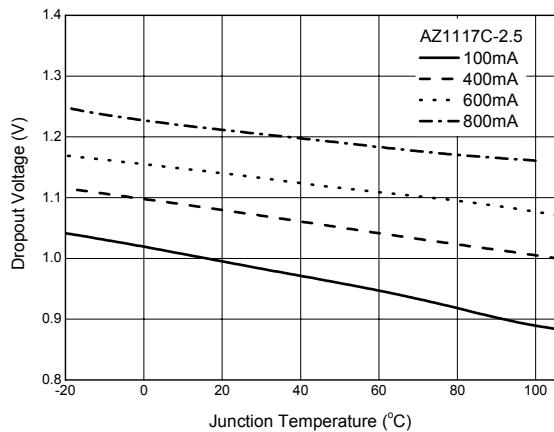


Figure 16. Dropout Voltage vs. Junction Temperature

## LOW DROPOUT LINEAR REGULATOR

AZ1117C

## Typical Applications

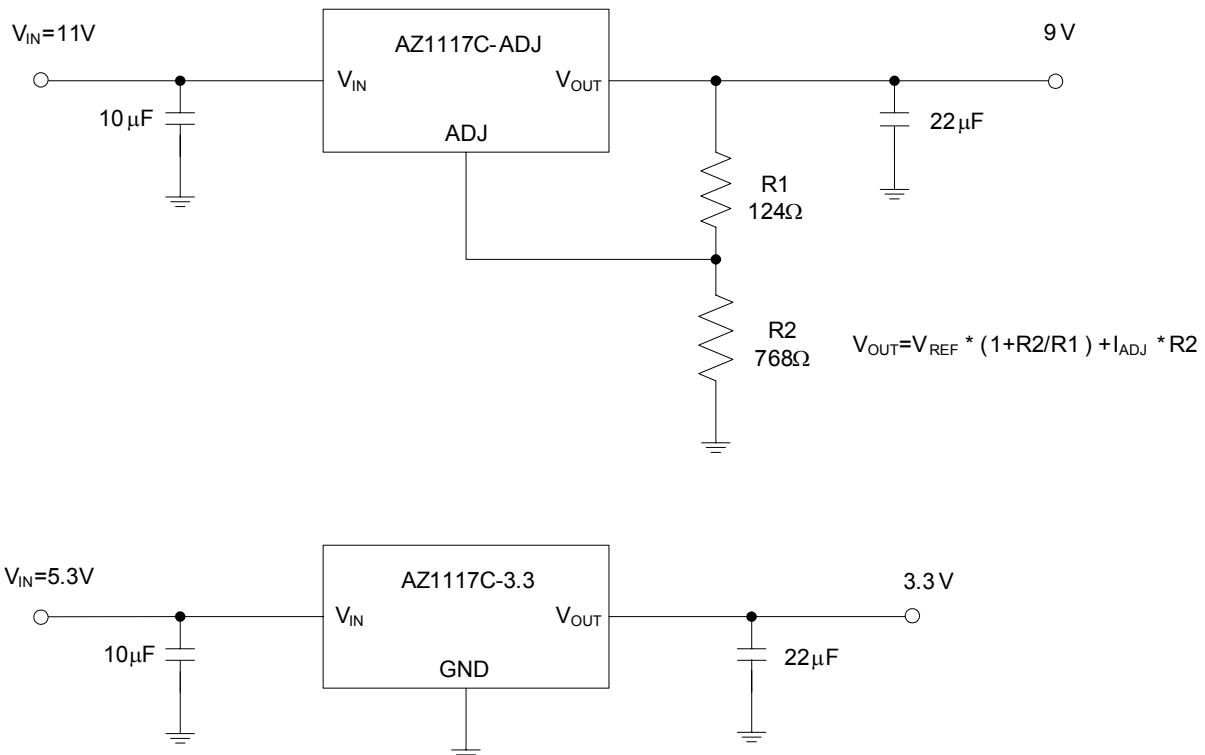


Figure 17. Typical Applications of AZ1117C


## LOW DROPOUT LINEAR REGULATOR

AZ1117C

## Mechanical Dimensions

SOT-223

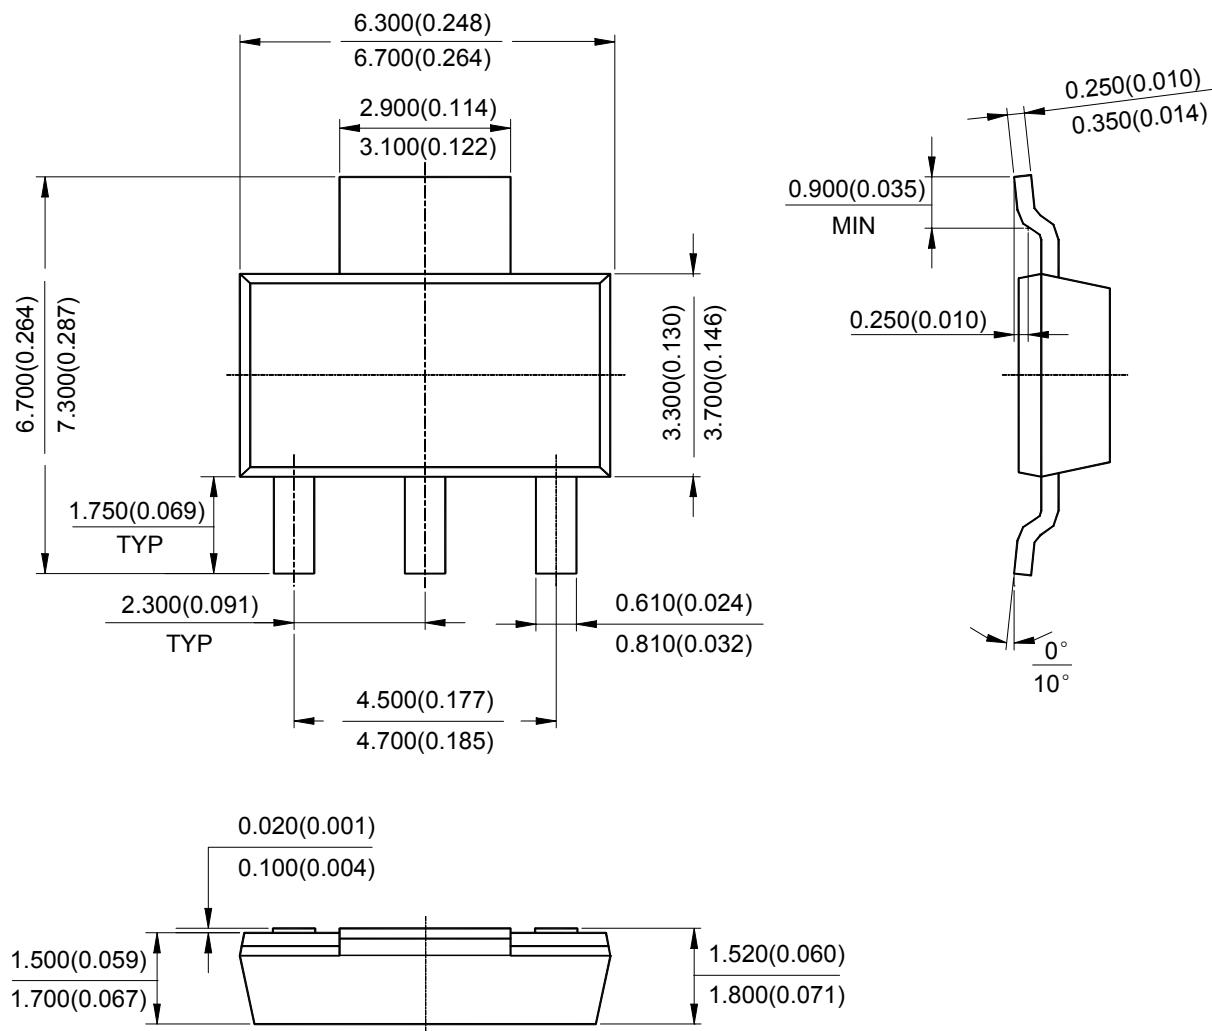Unit: mm(inch)






## LOW DROPOUT LINEAR REGULATOR

AZ1117C

## Mechanical Dimensions (Continued)

SOT-89

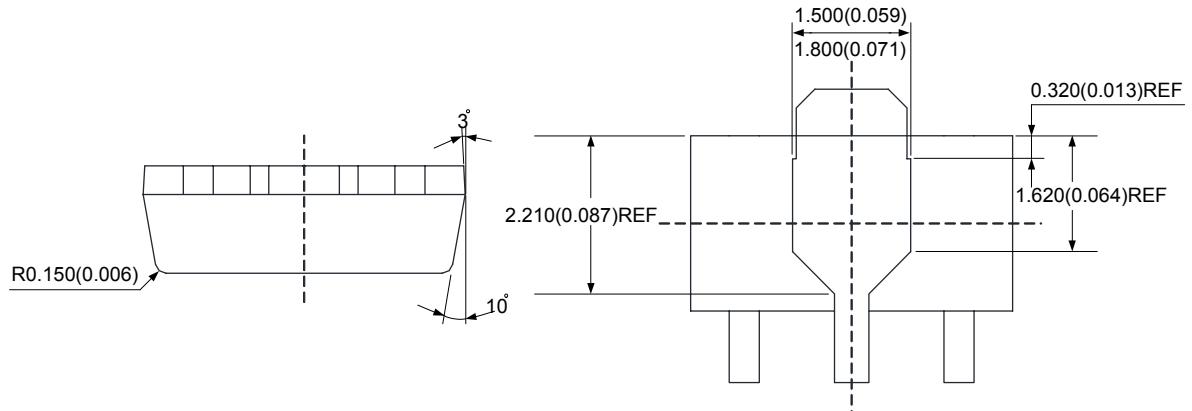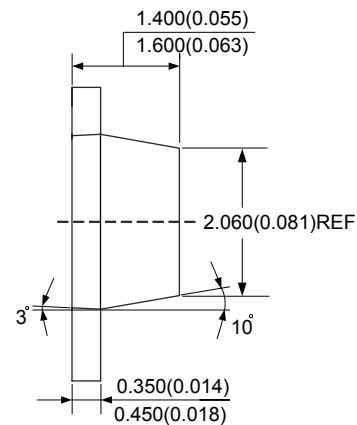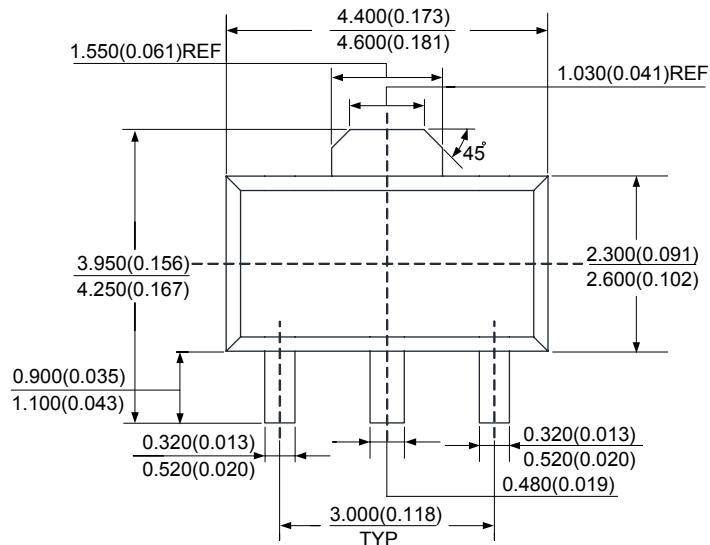Unit: mm(inch)




## LOW DROPOUT LINEAR REGULATOR

AZ1117C

## Mechanical Dimensions (Continued)

TO-252-2 (1)

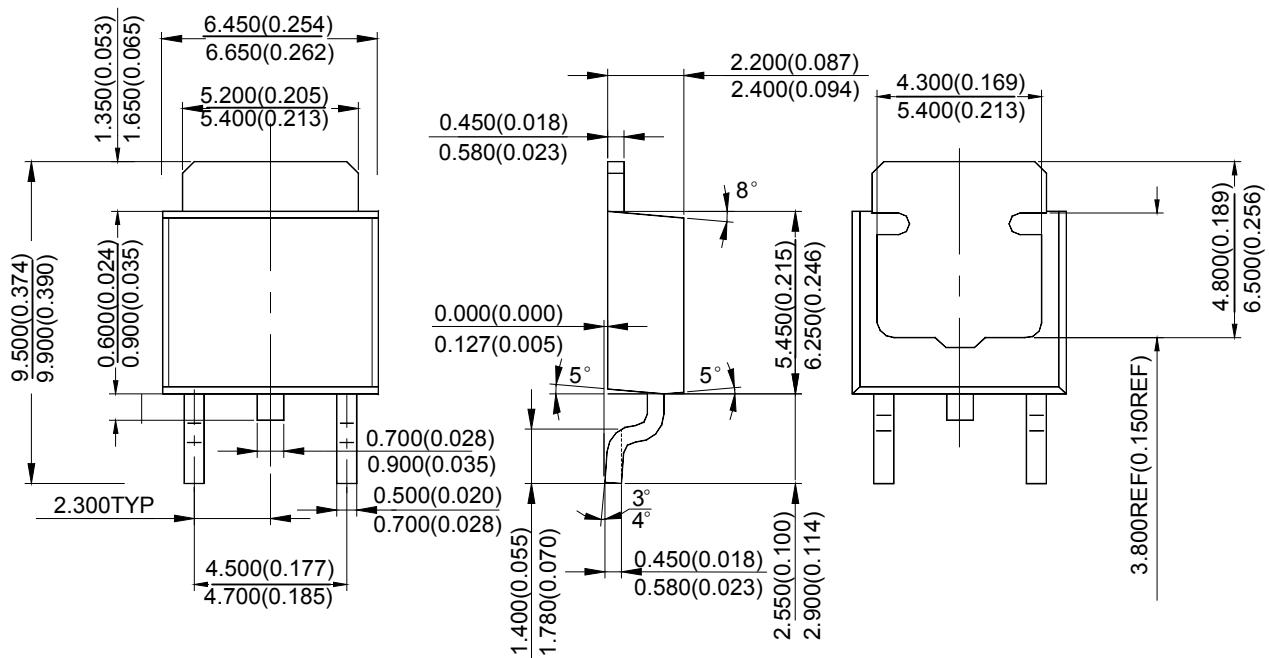Unit: mm(inch)




## LOW DROPOUT LINEAR REGULATOR

AZ1117C

## Mechanical Dimensions (Continued)

TO-252-2 (2)

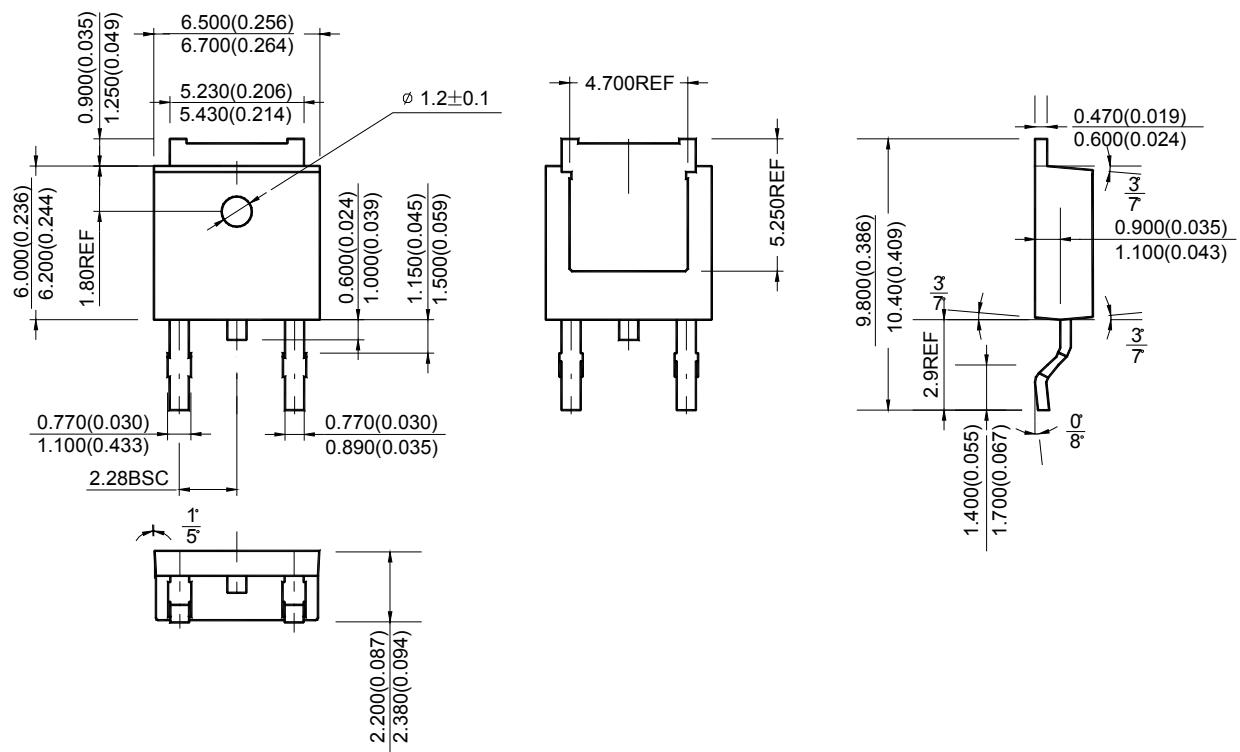Unit: mm(inch)




## LOW DROPOUT LINEAR REGULATOR

AZ1117C

## Mechanical Dimensions (Continued)

TO-252-2 (3)

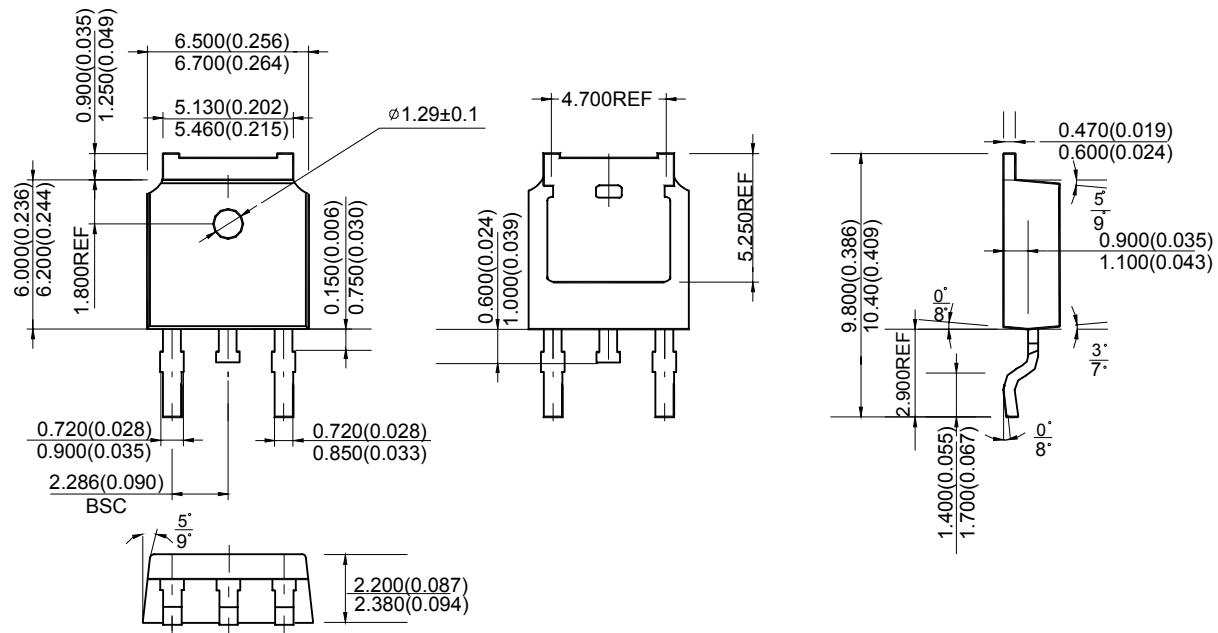Unit: mm(inch)




## LOW DROPOUT LINEAR REGULATOR

AZ1117C

## Mechanical Dimensions (Continued)

TO-252-2 (4)

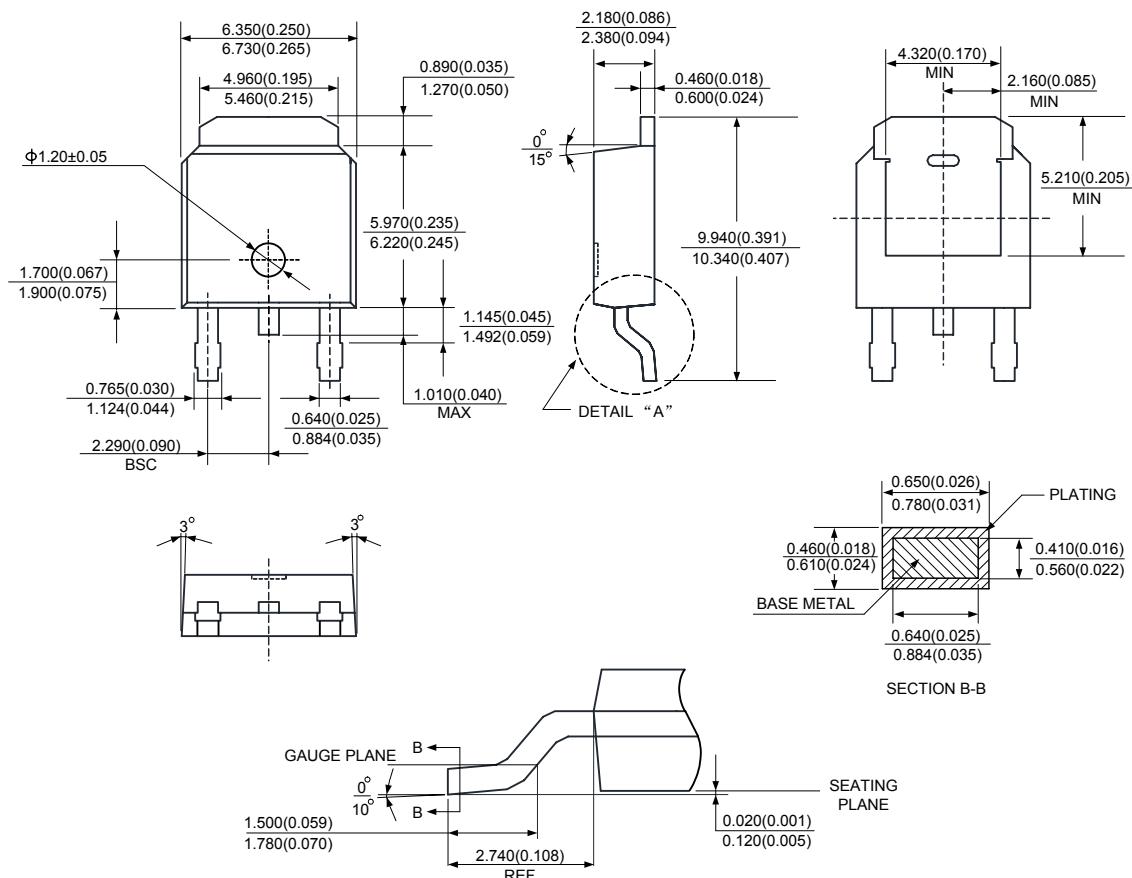Unit: mm(inch)





## BCD Semiconductor Manufacturing Limited

<http://www.bcdsemi.com>

### IMPORTANT NOTICE

BCD Semiconductor Manufacturing Limited reserves the right to make changes without further notice to any products or specifications herein. BCD Semiconductor Manufacturing Limited does not assume any responsibility for use of any its products for any particular purpose, nor does BCD Semiconductor Manufacturing Limited assume any liability arising out of the application or use of any its products or circuits. BCD Semiconductor Manufacturing Limited does not convey any license under its patent rights or other rights nor the rights of others.

---

#### MAIN SITE

##### - Headquarters

##### BCD Semiconductor Manufacturing Limited

No. 1600, Zi Xing Road, Shanghai ZiZhu Science-based Industrial Park, 200241, China  
Tel: +86-21-24162266, Fax: +86-21-24162277

##### - Wafer Fab

##### Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd.

800 Yi Shan Road, Shanghai 200233, China  
Tel: +86-21-6485 1491, Fax: +86-21-5450 0008

---

#### REGIONAL SALES OFFICE

##### Shenzhen Office

##### Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd., Shenzhen Office

Unit A Room 1203, Skyworth Bldg., Gaoxin Ave.I.S., Nanshan District, Shenzhen,  
China  
Tel: +86-755-8826 7951  
Fax: +86-755-8826 7865

##### Taiwan Office

##### BCD Semiconductor (Taiwan) Company Limited

4F, 298-1, Rui Guang Road, Nei-Hu District, Taipei,  
Taiwan  
Tel: +886-2-2656 2808  
Fax: +886-2-2656 2806

##### USA Office

##### BCD Semiconductor Corp.

30920 Huntwood Ave. Hayward,  
CA 94544, USA  
Tel : +1-510-324-2988  
Fax: +1-510-324-2788